EIZO®

Professional LCD Monitors

FlexScan®

FlexScan —
An Integrated Approach

EIZO started in 1968 as a manufacturer of OEM black and white televisions. By 1985, we were selling desktop CRT monitors under our own name. Since the birth of the EIZO FlexScan series more than 25 years ago, we have taken an integrated approach to research and development, quality control, and manufacturing — an approach that sets FlexScan apart from other business monitors.

Research and Development

To incorporate the latest technologies in our products we invest heavily in R&D. At our corporate headquarters in Japan we have a newly-built R&D center. Here, all the engineers who develop FlexScan products are in one location, allowing for improved efficiency and reduced development time.

Quality Control

Safety and reliability are hallmarks of FlexScan monitors. We have our own anechoic chambers to confirm that our products comply with international regulations covering electromagnetic interference (EMI) and susceptibility. We also conduct long-life testing where our monitors are kept powered on for tens of thousands of hours and their image quality is regularly checked.



Manufacturing

Our manufacturing combines manual and automated operations to ensure high quality products made as efficiently as possible. Manual operations are performed for assembly tasks that cannot be automated or for verifying image quality. Automated operations take advantage of robotic and CCD (charge coupled device) camera technologies to more efficiently perform mechanical tasks.

5-Year Warranty

As more desktop LCD monitor brands outsource development and production to third parties, we remain convinced that the best way to deliver the quality that our customers expect is to maintain our integrated approach. This gives us the confidence to back them up with the industry's only five-year manufacturer's warranty.*

**FlexScan touch screen monitors come with a 3-year warranty.*

The Cornerstone
of the EIZO Product Family

The general-purpose FlexScan series serves as the core for all of EIZO's product groups. The basic design and features of FlexScan monitors are incorporated into other product groups and then additional technologies are developed to meet the requirements of the fields in which they will be used.

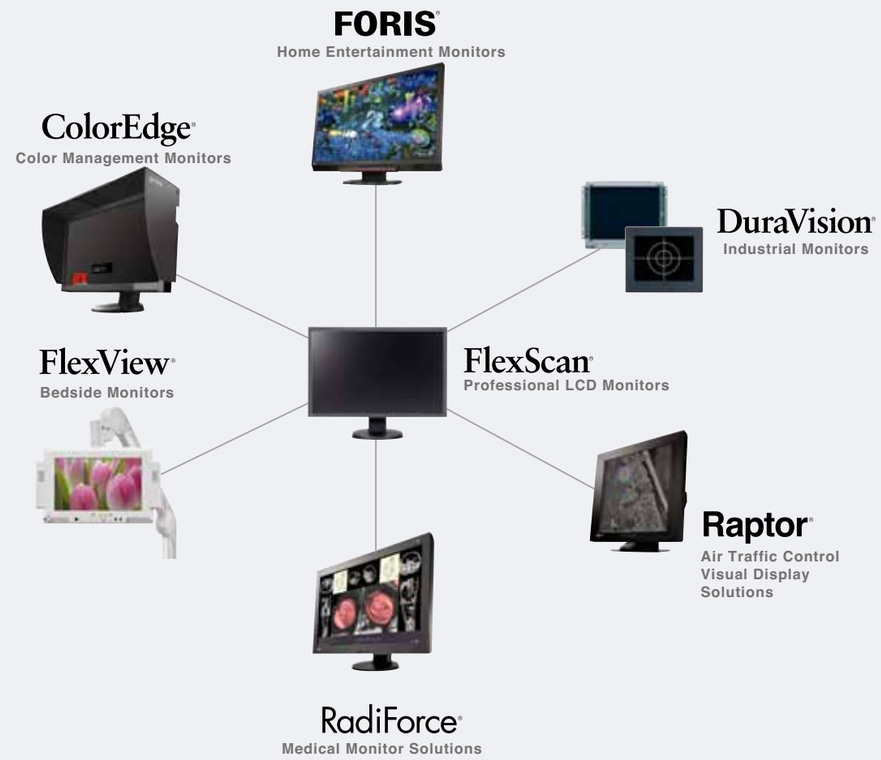

FlexScan EV Series

Minimize your running costs while bringing EIZO's most ecological features to your office, control room, or trading floor. The FlexScan EV (EcoView) series features a compact design, LED backlights, and several automated energy-saving technologies. The series is comprised of five models in 3 screen sizes (23", 24.1", and 27") and two panel technologies (IPS and TN).

Slim Bezel Design

Extraordinarily slim bezels on all four sides makes multi-screen computing much more comfortable.

Bezel sizes shown here are for 23-inch models.

Choice of Two Stands

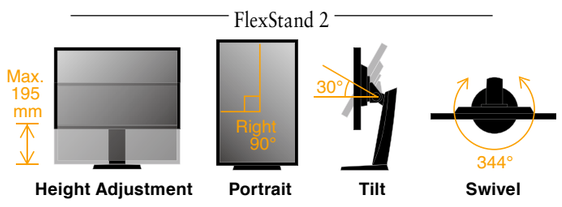

TriStand 2 is not available with the FlexScan EV2736W.

Getting Connected

Three input terminals are included for connecting to PCs. In addition, a USB hub and headphone/ audio jacks are conveniently located on the side of the monitor.

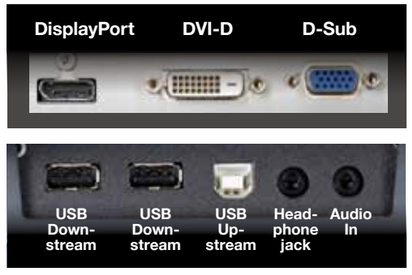

D-Sub input not included with the FlexScan EV2736W.

Built-in Speakers

Dual 1-watt speakers are integrated into the back of the monitor to provide audio capability without increasing the bezel size.

Flicker-Free Images

Due to the way brightness is controlled on LED backlights, many people perceive flicker on their screen which causes eye fatigue. The FlexScan EV series utilizes a hybrid solution to regulate brightness and make flicker unperceivable without compromising color stability.

Reduce Brightness, Optimize Energy Use

A new feature called EcoView Optimizer 2 saves energy by reducing the backlight brightness and increasing the gain. To maintain image quality, EcoView Optimizer 2 only boosts the gain with a screen consisting of mostly dark content because the accompanying reduction in brightness is almost unnoticeable.

Preset Modes for Optimum Viewing

5 preset modes ensure you always get the right setting for whatever application you are using.

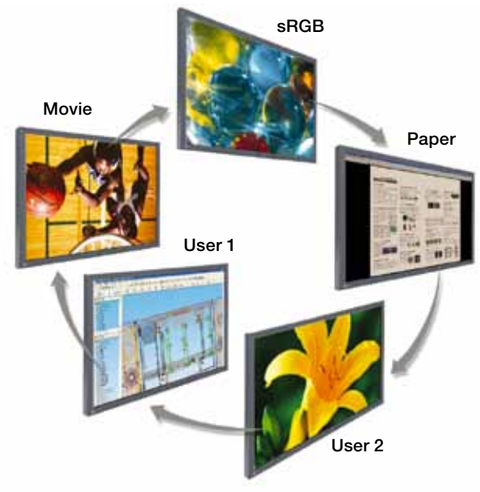

LED Backlights – Less Power, Longer Life

Compared to conventional CCFL backlights, LED backlights last longer and consume less power. They are also mercury-free to have minimal impact on the environment when they are eventually disposed of.

Tireless Eyes

To prevent eye fatigue, a brightness sensor called Auto EcoView detects the changes in the ambient brightness that occur throughout the day and automatically adjusts the screen to the ideal brightness level.

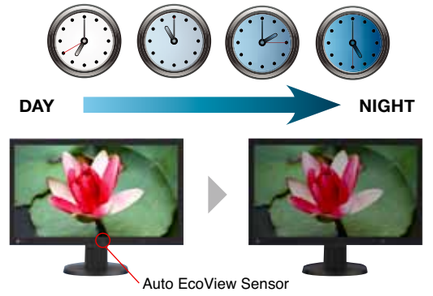

Presence Sensor for Energy Savings

A presence sensor called EcoView Sense 2 prompts the monitor to switch to power save mode when you are absent and then power on again when you return. It even works in a multi-monitor setup so all monitors remain on when you're at your desk.

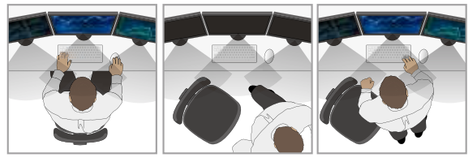

5-Year Warranty

A manufacturer's 5-year warranty that covers all components including the LCD panel ensures a long service life. This warranty is 2-years or 67% longer than the standard 3-year warranty of most monitor brands for significantly lower running costs.

FlexScan S Series

These versatile monitors are designed for back offices, trading floors, government facilities, CAD, and home use. They come in widescreen and square formats and range in size from 15" to 24.1".

Widescreen and Square Formats

A wide selection of formats and screen sizes are available to meet your needs. The square format comes in 15", 17", 19", and 21.3" sizes with 5:4 or 4:3 aspect ratios. Widescreen format comes in 22" and 24.1" sizes with 16:10 aspect ratios.

Best Positioning

An ergonomic stand offers height adjustment, tilt, swivel, and portrait mode* so you can adjust the monitor to the most comfortable position for you.

**The S1501-B does not offer height adjustment or portrait mode display.*

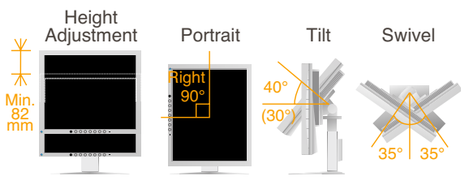

Tireless Eyes

A brightly-lit monitor can take a toll on your eyes. To prevent this, a brightness sensor called Auto EcoView detects the changes in the ambient brightness that occur throughout the day and automatically adjusts the screen to the ideal brightness level.

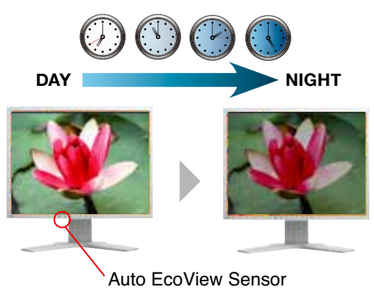

Digital and Analog Inputs

With both DVI and D-Sub mini 15-pin inputs, you can use a computer that has either a digital or an analog graphics board (or both if connected to two computers), and quickly switch between the inputs via a front panel button.

Unobtrusive Speakers

0.5 watt speakers deliver audio capability and are built into the back of the cabinet where they are out of view and do not increase bezel size.

Speakers are hidden away in the back of the monitor to minimize bezel size.

Preset Modes

For optimum viewing of different kinds of content, Text mode, sRGB mode, and Custom mode (user-defined settings) are included on all S Series models with most models having additional presets. You can switch between modes manually with the press of a button or automatically with the bundled ScreenManager Pro for LCD software.

10-Bit Gamma Correction

These monitors automatically take 8-bit input signals (256 tones for each primary color) from the graphics board and use a 10-bit look-up table (1,021 tones) to produce smoother gradations of color.



Support for Sync-on-Green

The FlexScan S1921-X, S1902, S1721-X, and S1701-X can be used with legacy graphics boards that output a sync-on-green signal.

FlexScan Touch Screens

The convenience of touch panel monitors makes them a practical choice for hospitals, factories, reception areas, and retail shops. Finger touch is standard, with pen touch available when using the optional TP1 dedicated touch pen. The FlexScan lineup includes both single and multitouch monitors.

A Selection of Touch Technologies

FlexScan touch screen monitors come in four technology types.

Technology	Finger Touch	Glove Touch	Durability	Water and Dust Resistance	Transmittance
Infrared Optical Imaging	Excellent	Excellent	Excellent	Good	Excellent
Analog Capacitive	Excellent	No	Good	Excellent	Excellent
Surface Acoustic Wave	Excellent	Good	Good	Fair	Excellent
Analog Resistive	Excellent	Excellent	Fair	Excellent	Fair

Available in Four Screen Sizes

23" 1920 x 1080 | 19" 1280 x 1024 | 17" 1280 x 1024 | 15" 1024 x 768

Touch Interface

For use with different systems these touch screen monitors are available with either an RS232 serial port or USB upstream interface.

Digital and Analog Inputs

Best Positioning

The T2351W, T1751, and T1721 come with stands that let you tilt the monitor back so you can look almost directly down at the screen as if you were reading a book and comfortably touch it with your elbows resting on the desktop. Most other models come with a height adjustable stand that also lets you tilt the screen back and forth and swivel it from side to side.

Stand included with T2351W and T1751.

Wide Viewing Angles

Several models use IPS (in-lane switching) or VA (vertical alignment) LCD panels with wide viewing angles up to 178°. This ensures two people can comfortably view the screen while sitting side-by-side.

Detailed Color Control

Hue, gain, saturation, and color temperature in 500 K increments from 4,000 – 10,000 K (and 9,300 K) are all user adjustable. An sRGB mode is also included for color matching with other applications and peripherals that also support this color space.

Multitouch Monitors

Both intuitive and enjoyable to work with, multitouch lets you tap, scroll, drag, pinch, spin, etc. with your fingers instead of a mouse and keyboard. The multitouch interface is supported by Windows 7. (Available with T2351W and T1751 only.)

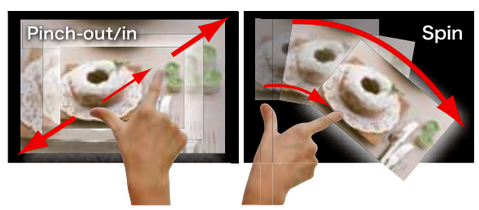

SPECIFICATIONS

		FlexScan EV2736W	FlexScan EV2436W	FlexScan EV2416W	FlexScan EV2336W	FlexScan EV2316W	FlexScan S2243W	FlexScan S2202W	FlexScan S2100	FlexScan S1932
Panel	**Size**	27" / 68 cm (684 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	23" / 58 cm (584 mm diagonal)	23" / 58 cm (584 mm diagonal)	22" / 56 cm (558 mm diagonal)	22" / 56 cm (558 mm diagonal)	21.3" / 54 cm (540 mm diagonal)	19" / 48 cm (481 mm diagonal)
	Display Size (H x V)	596.7 x 335.6 mm	518.4 x 324 mm	518.4 x 324 mm	509.8 x 286.7 mm	509.8 x 286.7 mm	473.8 × 296.1 mm	473.8 × 296.1 mm	432 × 324 mm	376 × 301 mm
	Type	IPS	IPS	TN	IPS	TN	VA (with overdrive circuit)	TN	VA (with overdrive circuit)	VA (with overdrive circuit)
	Viewing Angles (H , V, typical)	178°, 178°	178°, 178°	170°, 160°	178°, 178°	170°, 160°	178°, 178°	170°, 160°	178°, 178°	178°, 178°
	Brightness (Typical)	300 cd/m^2	300 cd/m^2	250 cd/m^2	250 cd/m^2	250 cd/m^2	350 cd/m^2	300 cd/m^2	300 cd/m^2	250 cd/m^2
	Contrast Ratio (Typical)	1000:1	1000:1	1000:1	1000:1	1000:1	1200:1	1000:1	1000:1	1000:1 (2500:1 dynamic contrast)
	Response Time (Typical)	6 ms (Gray-to-gray)	6 ms (Gray-to-gray)	5 ms (black-white-black)	6 ms (Gray-to-gray)	5 ms (black-white-black)	Gray-to-gray: 6 ms, black-white-black: 12 ms	Gray-to-gray: – , black-white-black: 5 ms	Gray-to-gray: 8 ms, black-white-black: 16 ms	Gray-to-gray: 8 ms, black-white-black: 20 ms
	Native Resolution	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)	1920 × 1200 (16:10 aspect ratio)	1680 × 1050 (16:10 aspect ratio)	1600 × 1200 (4:3 aspect ratio)	1280 × 1024 (5:4 aspect ratio)
	Pixel Pitch	0.2331 x 0.2331 mm	0.270 x 0.270 mm	0.270 x 0.270 mm	0.2655 x 0.2655 mm	0.2655 x 0.2655 mm	0.247 × 0.247 mm	0.282 × 0.282 mm	0.270 × 0.270 mm	0.294 × 0.294 mm
	Maximum Display Colors	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million colors	16.77 million colors	16.77 million colors	16.77 million colors
Video and USB	**D-Sub mini 15 pin**	-	•	•	•	•	•	•	•	•
	DVI-D 24 pin	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP support)	• (with HDCP support)	–	• (with HDCP support)
	DisplayPort	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP)	• (with HDCP support)	–	–	–
	Analog Scan. Freq. (H, V)	-	31 - 81 kHz, 55 - 76 Hz	31 - 76 kHz, 55 - 61 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 68 kHz, 55 - 61 Hz	31 – 94 kHz, 55 – 76 Hz	31 – 82 kHz, 55 – 76 Hz	24 – 80 kHz, 49 – 76 Hz	24.8 – 80 kHz, 50 – 75 Hz
	Digital Scan. Freq. (H, V)	31 - 89 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) (WQHD SL: 29 - 31 Hz)	31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 76 kHz, 59 - 61 Hz	31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 67.5 KHz, 59 - 61 Hz	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 65 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
	USB Ports / Standard	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	–	1 upstream, 2 downstream / USB 2.0	1 upstream / USB 2.0
Audio	**Speakers**	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	–	0.5 W + 0.5 W speakers
	Input / Output Terminals	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	–	3.5 mm stereo jack / 3.5 mm headphone jack
Power	**Power Requirements**	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
	Power Consumption	24 W (typical), 67 W (maximum)	19 W (typical), 60 W (maximum)	15 W (typical), 45 W (maximum)	16 W (typical), 47 W (maximum)	14 W (typical), 43 W (maximum)	36 W (typical), 90 W (maximum)	23 W (typical), 51 W (maximum)	33 W (typical), 70 W (maximum)	24 W (typical), 45 W (maximum)
	Power Save Mode	Less than 0.5 W	Less than 0.3 W	Less than 0.3 W	Less than 0.3 W	Less than 0.3 W	Less than 1.5 W	Less than 0.7 W	Less than 2 W	Less than 0.8 W
Physical Specifications	**Height Adjustment Range**	145 mm (maximum 195 mm)	FlexStand 2: 158 mm (maximum 195 mm) TriStand 2: 60 mm	FlexStand 2: 158 mm (maximum 195 mm) TriStand 2: 60 mm	FlexStand 2: 179 mm (maximum 195 mm) TriStand 2: 60 mm	FlexStand 2: 179 mm (maximum 195 mm) TriStand 2: 60 mm	174 mm	100 mm	82 mm	100 mm
	Tilt / Swivel / Pivot	30° Up, 0° Down / 172° Right, 172° Left / 90°	FlexStand 2: 30° Up, 0° Down / 172° Right, 172° Left / 90° TriStand 2: 25° Up, 0° Down / 172° Right, 172° Left / 90°	FlexStand 2: 30° Up, 0° Down / 172° Right, 172° Left / 90° TriStand 2: 25° Up, 0° Down / 172° Right, 172° Left / 90°	FlexStand 2: 30° Up, 0° Down / 172° Right, 172° Left / 90° TriStand 2: 25° Up, 0° Down / 172° Right, 172° Left / 90°	FlexStand 2: 30° Up, 0° Down / 172° Right, 172° Left / 90° TriStand 2: 25° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	40° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°
	Dimensions	640 x 399.5 - 544.5 x 245.5 mm	FlexStand 2: 552.5 x 376 - 534 x 200 mm TriStand 2: 552.5 x 408 - 468 x 245.5 mm	FlexStand 2: 552.5 x 376 - 534 x 200 mm TriStand 2: 552.5 x 408 - 468 x 245.5 mm	FlexStand 2: 540 x 360 - 513.5 x 245.5 mm TriStand 2: 540 x 387.5 - 447.5 x 200 mm	FlexStand 2: 540 x 360 - 513.5 x 245.5 mm TriStand 2: 540 x 387.5 - 447.5 x 200 mm	511 × 347.5 – 521.5 × 240.5 – 256 mm	507 × 406 – 506 × 205 mm	465 × 453 – 535 × 208.5 mm	405 × 406.5 – 506.5 × 205 mm
	Dimensions (Without Stand)	640 x 379 x 65 mm	552.5 x 358 x 57 mm	552.5 x 358 x 57 mm	540 x 317.5 x 56 mm	540 x 317.5 x 56 mm	511 × 333 × 85 mm	507 × 333 × 74 mm	465 × 361 × 64 mm	405 × 334 × 61.5 mm
	Net Weight	10 kg	FlexStand 2: 6.7 kg TriStand 2: 5.3 kg	FlexStand 2: 6.3 kg TriStand 2: 4.9 kg	FlexStand 2: 6.3 kg TriStand 2: 4.9 kg	FlexStand 2: 5.7 kg TriStand 2: 4.3 kg	9.6 kg	7.7 kg	9.7 kg	7.2 kg
	Net Weight (Without Stand)	7.3 kg	4.1 kg	3.7 kg	3.7 kg	3.1 kg	6.6 kg	5.8 kg	6.7 kg	5.2 kg
EcoView Features	**Auto EcoView**	•	•	•	•	•	•	•	•	•
	EcoView Index	•	•	•	•	•	•	•	–	–
	EcoView Sense	•	•	•	•	•	–	–	–	–
	EcoView Optimizer	-	•	•	•	•	–	–	–	–
OSD Adjustment Functions	**Screen Adjustment**	Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity,	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge), Smoothing (5 stages), Border Intensity,	Clock, Phase, Position, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Signal Filter, Smoothing (5 stages)	Clock, Phase, Position, Resolution, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Sharpness
	Color Adjustment	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Overdrive, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Overdrive, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Overdrive, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset, Saturation, Hue, Gamma, ContrastEnhancer
	Power Management	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer
	Sound	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save	–	Volume
	Other Settings	Signal Switching, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, Reset	Signal Switching, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, Reset	Signal Switching, Up View, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock ,Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, Reset	Signal Switching, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, Reset	Signal Switching, Up View, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, Reset	Signal Switching, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Input Priority, Product Information, OSD Menu Settings, BrightRegulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Signal Switching, Product Information, BrightRegulator, Power Indicator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset
Other Features	**Preset Modes**	Paper, Movie, sRGB, User1, User2	Paper, Movie, sRGB, User1, User2	Paper, Movie, sRGB, User1, User2	Paper, Movie, sRGB, User1, User2	Paper, Movie, sRGB, User1, User2	Fine Contrast (EyeCare, Text, Picture, Movie, sRGB, Custom)	Fine Contrast (Text, Picture, Movie, sRGB, Custom)	Fine Contrast (Text, Picture, Movie, sRGB, Custom)	Fine Contrast (Text, Picture, Movie, CAD, sRGB, Custom)
General	**Available Cabinet Colors**	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black
	Certifications & Standards	TCO Displays 6.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Silver (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, CCC, GOST-R	TCO'03, TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R
	Supplied Accessories	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [USB], ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ICC Profile, ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), audio cable, EIZO LCD Utility Disk (HTML user's manual, ScreenManager Pro for LCD [USB], ICC Profile), warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), USB cable, audio cable, setup manual, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [USB], ICC profiles), 4 screws for mount option, warranty card
	Warranty	Five Years[1]	Five Years[1]	Five Years[1]	Five Years[1]	Five Years[1]	Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]

[1]The usage time is limited to 30,000 hours or less from the date of purchase. [2] The usage time is limited to 30,000 hours or less, and the warranty period of the LCD panel is limited to three years from the date of purchase.

FlexScan S1921-X	FlexScan S1902	FlexScan S1721-X	FlexScan S1701-X	FlexScan S1501-B
19" / 48 cm (481 mm diagonal)	19" / 48 cm (481 mm diagonal)	17" / 43 cm (432 mm diagonal)	17" / 43 cm (432 mm diagonal)	15" / 38 cm (380 mm diagonal)
376 × 301 mm	376 × 301 mm	338 × 270 mm	338 × 270 mm	304.1 × 228.1 mm
VA	TN	VA	TN	TN
178°, 178°	170°, 160°	178°, 178°	160°, 160°	160°, 130° (at contrast ratio of 10:1)
250 cd/m^2	250 cd/m^2	250 cd/m^2	300 cd/m^2	250 cd/m^2
1000:1	1000:1	1500:1	1000:1	700:1
Black-white-black: 20 ms	Black-white-black: 5 ms	Black-white-black: 25 ms	Black-white-black: 5 ms	Gray-to-gray: – , black-white-black: 8 ms
1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1024 × 768 (4:3 aspect ratio)
0.294 × 0.294 mm	0.294 × 0.294 mm	0.264 × 0.264 mm	0.264 × 0.264 mm	0.297 × 0.297 mm
16.77 million colors	16.77 million colors	6.77 million colors	16.77 million colors	8-bit display, 16.19 million colors
•	•	•	•	•
• (with HDCP support)	• (with HDCP support)	• (with HDCP support)	• (with HDCP support)	•
–	–	–	–	–
31 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz	24.8 – 60 kHz, 55 – 75 kHz
31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 49 Hz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
–	–	–	–	–
0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers
3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack
AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
22 W (typical), 40 W (maximum)	15 W (typical), 30 W (maximum)	19 W (typical), 38 W (maximum)	19 W (typical), 38 W (maximum)	12 W (typical), 25 W (maximum)
Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 1 W
With Stand: 100 mm	With Stand: 100 mm	With Stand: 100 mm	With Stand: 100 mm	–
30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / –
405 × 406.5 – 506.5 × 205 mm	405 × 406.5 – 506.5 × 205 mm	363 × 389.5 – 489.5 × 205 mm	363 × 389.5 – 489.5 × 205 mm	346 × 325 × 175 mm
405 × 334 × 61.5 mm	405 × 334 × 61.5 mm	363 × 300 × 59 mm	363 × 300 × 59 mm	346 × 280 × 69 mm
7.2 kg	7.2 kg	5.9 kg	5.9 kg	5.3 kg
5.2 kg	5.2 kg	3.9 kg	3.9 kg	3.7 kg
•	•	•	•	–
•	•	•	•	–
–	–	–	–	–
–	–	–	–	–
Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)
Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Gain, Reset
Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM), Off Timer
Volume	Volume	Volume	Volume	Volume
Signal Switching, Power Indicator, Product Information, OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information, OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information, OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information, OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information, OSD Menu Position, BrightRegulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset, DDC/CI Lock
Fine Contrast (Text, sRGB, EyeCare, Paper, Custom)	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom)	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom)	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom)	Text, sRGB, Custom
Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black
TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 9241-307), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R
AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), USB cable, audio cable, setup manual, CD-ROM (PDF user's manual, ICC profiles), 4 screws for mount option, warranty card
Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]

Wall Mount Arms

EIZO offers two options for mounting your monitor on a wall. The LA-030-W is a 3-axis arm with tilt, swivel, and rotation for portrait mode. It can be extended more than 500 mm away from or placed against the wall when not in use. The LA-011W is a single-axis arm with a minimum profile and tilt/swivel.

LA-030-W

LA-011-W

Supported Monitors: EV2736W, EV2436W, EV2316W, EV2336W, EV2316W, S2243W, S2202W, S2100, S1932, S1921-X, S1902

Dual Height Adjustable Stands

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2100, S1932, S1921-X, S1721-X, S1701-X, S1501-B

LS-HM1-D

Protection Panels

These panels fit between the LCD screen and bezel to protect against dust and scratches. They come in reversible glossy and non-glare sides.

Supported Models: All FlexScan EV and S series monitors

Screen Cleaner Kit



Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.

Touch Panel Pointer

This dedicated touch pen is ideal for factory settings where the user is wearing gloves or with dense menus that are too small to touch with a finger.



Supported Monitors: L761T-C, L760T-C, L560T-CB, T1721, L363T-C, L362T, T1502-B, T1501-B

Power Management Software

EIZO EcoView NET power management software helps organizations take advantage of the ergonomic and energy-saving features of EIZO monitors by allowing a network administrator to adjust their brightness and power settings from a central location. This software is compatible with Windows 7, Vista, and XP and is available free of charge. Please see www.eizo.com for details.

Supported Models: EV2736W, EV2436W, EV2416W, EV2336W, EV2316W, S2243W, S2202W, S1921-X, S1721-X, S1701-X, T2351W, T1751

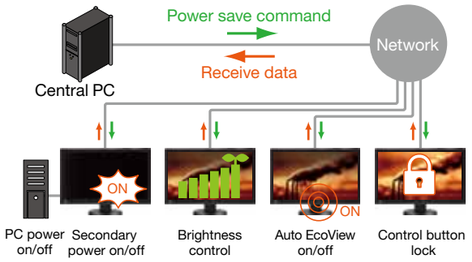

ScreenManager Pro for LCD and ScreenTuner

Developed for Windows and Macintosh OSes respectively, these two free applications let you adjust your monitor's color with your mouse rather than the OSD menu buttons. With ScreenManager Pro for LCD you can also set the off timer, adjust speaker volume, and assign a preset mode to a specific application so that mode becomes active whenever the application is in use.

Available from www.eizo.com. ScreenManager Pro is compatible with all FlexScan EV and S series models, the T2351W and the T1751. ScreenTuner is compatible with the S2243W, S2100, and S1932.

SPECIFICATIONS

		Touch Panel FlexScan L761T-C FlexScan L760T-C	FlexScan L560T-CB	FlexScan T1721	FlexScan L363T-C FlexScan L362T	FlexScan T1502-B FlexScan T1501-B	Multi Touch FlexScan T2351W	FlexScan T1751
LCD Panel	**Size**	19" / 48 cm (481 mm diagonal)	17" / 43 cm (432 mm diagonal)	17" / 43 cm (432 mm diagonal)	15" / 38 cm (380 mm diagonal)	15" / 38 cm (380 mm diagonal)	23" / 58 cm (584 mm diagonal)	17" / 43 cm (432 mm diagonal)
	Display Size (H × V)	376 × 301 mm	338 × 270 mm	338 × 270 mm	304 × 228 mm	304 × 228 mm	509.8 × 286.7 mm	338 × 270 mm
	Type	VA	VA	TN	IPS	TN	VA (with overdrive circuit)	VA
	Viewing Angles (H, V, typical)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	160°, 160° (at contrast ratio of 10:1)	170°, 170° (at contrast ratio of 10:1)	160°, 130° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)
	Brightness (Typical)	180 cd/m²	180 cd/m²	200 cd/m²	195 cd/m²	195 cd/m²	255 cd/m²	180 cd/m²
	Contrast Ratio (Typical)	1000:1	1500:1	1000:1	450:1	700:1	3000:1	1500:1
	Response Time (Typical)	Gray-to-gray: – , black-white-black: 20 ms	Gray-to-gray: – , black-white-black: 25 ms	Gray-to-gray: – , black-white-black: 5 ms	Gray-to-gray: – , black-white-black: 55 ms	Gray-to-gray: – , black-white-black: 8 ms	Gray-to-gray: 7 ms, black-white-black: 25 ms	Gray-to-gray: – , black-white-black: 25 ms
	Native Resolution	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1024 × 768 (4:3 aspect ratio)	1024 × 768 (4:3 aspect ratio)	1920 × 1080 (16: 9 aspect ratio)	1280 × 1024 (5:4 aspect ratio)
	Pixel Pitch	0.294 × 0.294 mm	0.264 × 0.264 mm	0.264 × 0.264 mm	0.297 × 0.297 mm	0.297 × 0.297 mm	0.2655 × 0.2655 mm	0.264 × 0.264 mm
	Maximum Display Colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.19 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors
Touch Panel	**Type**	Analog capacitive (finger touch)	Analog capacitive (finger touch)	Surface acoustic wave	Analog capacitive (finger touch)	Analog resistive	Infrared Optical Imaging	Infrared Optical Imaging
	Touch Life	225 million touches (minimum)	225 million touches (minimum)	50 million touches (minimum)	225 million touches (minimum)	10 million touches (minimum)	–	–
	Compatible OS	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Windows 7 32-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Multi-touch: Windows 7 32-bit and 64-bit Single-touch: Windows Vista 32-bit and 64-bit	Multi-touch: Windows 7 32-bit and 64-bit Single-touch: Windows Vista 32-bit and 64-bit
	Communication Protocol	L761T-C: USB; L760T-C: RS-232C	USB	USB	L363T-C: USB; L362T: RS-232C	T1502-B: USB; T1501-B: RS-232C	USB	USB
Video and USB	**D-Sub mini 15 pin**	•	•	•	•	•	•	•
	DVI-D 24 pin	•	•	•	•	•	• (with HDCP support)	• (with HDCP support)
	DisplayPort	–	–	–	–	–	–	–
	Analog Scan. Freq. (H, V)	30 – 81 kHz, 49.5 – 75.5 kHz	30 – 81 kHz, 49.5 – 75.5 Hz	24.8 – 80 kHz, 50 – 75 Hz	24 – 61 kHz, 55 – 76 Hz	24.8 – 60 kHz, 55 – 75 kHz	31 – 81 kHz, 55 – 76 Hz	24.8 – 80 kHz, 50 – 75 Hz
	Digital Scan. Freq. (H, V)	30 – 65 kHz, 59 – 61 Hz (VGA Text: 70 Hz)	30 – 65 kHz, 59 – 61 Hz (VGA Text: 70 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 49 kHz, 59 – 61 Hz (VGA Text: 70 Hz)	31 – 49 Hz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	HDMI: 15 – 68 kHz, 49 – 61 Hz (VGA Text: 69 – 71 Hz); DVI: 31 – 68 kHz, 59 – 61 Hz	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
	USB Ports / Standard	–	–	1 upstream / USB 2.0	–	–	1 upstream / USB 2.0	1 upstream / USB 2.0
Audio	**Speakers**	–	–	0.5 W + 0.5 W speakers	1 W + 1 W speakers	0.5 W + 0.5 W speakers	0.35 W speaker	0.5 W + 0.5 W speakers
	Input / Output Terminals	–	–	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack
Power	**Power Requirements**	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
	Power Consumption	40 W (maximum)	35 W (maximum)	34 W (maximum)	40 W (maximum)	25 W (maximum)	24 W (typical), 45 W (maximum)	34 W (maximum)
	Power Save Mode	–	–	Less than 2.6 W	Less than 3 W	Less than 1 W	Less than 1.3 W	Less than 1.2 W
Physical Specifications	**Height Adj. Range**	82 mm	82 mm	104 mm	–	–	–	–
	Tilt / Swivel / Pivot	40° Up, 0° Down / 35° Right, 35° Left	40° Up, 0° Down / 35° Right, 35° Left	60° Up, 5° Down / – / –	30° Up, 3° Down / –	30° Up, 0° Down / 35° Right, 35° Left / –	15°, 25°, 35°, 45°, 55°, 65° / – / –	15°, 25°, 35°, 45°, 55°, 65° / – / –
	Dimensions	414 × 442.5 – 524.5 × 208.5 mm	380 × 432.5 – 514.5 × 208.5 mm	380 × 280 – 415 × 200 – 335 mm	346 × 369 × 157 mm	346 × 379.5 × 175 mm	557 × 204.5 – 375.5 × 194 – 367 mm	392 × 199 – 366 × 191 – 360 mm
	Dimensions (Without Stand)	414 × 340 × 64 mm	380 × 353 × 58 mm	380 × 353 × 58 mm	346 × 301 × 54.5 mm	346 × 280 × 69 mm	557 × 367 × 68 mm	392 × 357 × 66.5 mm
	Net Weight	9.0 kg	8.2 kg	7.0 kg	5 kg	6.1 kg	7.7 kg	5.3 kg
	Net Weight (Without Stand)	6.0 kg	5.2 kg	5.2 kg	4.1 kg	4.1 kg	6.9 kg	4.5 kg
EcoView Features	**Auto EcoView**	–	–	•	–	•	•	•
	EcoView Index	–	–	•	–	–	•	–
	EcoView Sense	–	–	–	–	–	–	–
	EcoView Optimizer	–	–	–	–	–	–	–
OSD Adjustment Functions	**Screen Adjustment**	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto/RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)
	Color Adjustment	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Gamma, Temperature, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Gain, Reset	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Gain, Reset	Brightness, Black Level, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Power Resolution, Overdrive, Reset	Brightness, Contrast, Temperature, Gain, Reset
	Power Management	Off Timer	Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer
	Sound	–	–	Volume	Volume	Volume	Volume, Power Save, Source (HDMI)	Volume
	Other Settings	Signal Settings, VGA Selection, Product Information, OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Reset	Signal Settings, VGA Selection, Product Information, OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Reset	Signal Settings, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, VGA Selection, Product Information. OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Sound (volume, mute), Reset	Signal Settings, Power Indicator, Product Information, OSD Menu Position, BrightRegulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Product Information, OSD Menu Settings, HDMI Color Space, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Product Information, OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset
Other Features	**Preset Modes**	sRGB, Custom	sRGB, Custom	sRGB, Custom, EyeCare, Text	sRGB, Custom	Text, sRGB, Custom	Game, Cinema, Paper, sRGB, User1, User2	sRGB, Custom, EyeCare, Text
	Digital Uniformity Equal.	–	–	–	–	–	–	–
General	**Available Cabinet Colors**	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray - Black Two Tone, Black	Gray - Black Two Tone, Black
	Certifications & Standards	TÜV/GM (EN60601-1), CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC	TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC, GOST-R	EPEAT Silver (US), c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC	TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE	EPEAT Silver (US), TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R
	Supplied Accessories	AC power cord, user's manual, signal cable (D-Sub mini 15 pin), USB cable, quick reference, CD-ROM (touch panel driver and user's manual), warranty card	AC power cord, user's manual, signal cable (D-Sub mini 15 pin), USB cable, quick reference, CD-ROM (touch panel driver and user's manual), warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cable (D-Sub mini 15 pin), audio cable, USB cable (L363T-C), touch panel cable (L362T), user's manual, CD-ROM (touch panel driver), 4 screws for mount option, warranty card	AC power cord, user's manual, signal cable (D-Sub mini 15 pin), touch panel cable (T1502-B / USB, T1501-B / RS-232C), audio cable, CD-ROM (touch panel driver and user's manual), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, touch pen, cleaning cloth, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, touch pen, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, warranty card
	Warranty	Three Years	Three Years	Three Years	Three Years	Three Years	Three Years	Three Years

EIZO Corporation
153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6792 Fax: +81-76-277-6793
www.eizo.com

© 2012 Eizo Corporation
Thomson Reuters Eikon is a trademark of Thomson Reuters and its affiliated companies. EIZO ScreenSlicer, EIZO EasyPIX, and EIZO EcoView NET are trademarks, and ScreenManager, FlexScan, and EIZO are registered trademarks of Eizo Corporation.
Specifications are subject to change without notice.
(120902) Printed in Japan, 9, 2012, 5K